


GREENLITE TRAFFIC SIGNAL ACCESSORIES

GREENLITE TRAFFIC Signal Accessories are engineered to meet or exceed all standards contained in *The Manual for Uniform Traffic Control Devices for Canada*. GREENLITE TRAFFIC Designs meet all specifications set by the Institute for Traffic Engineers.

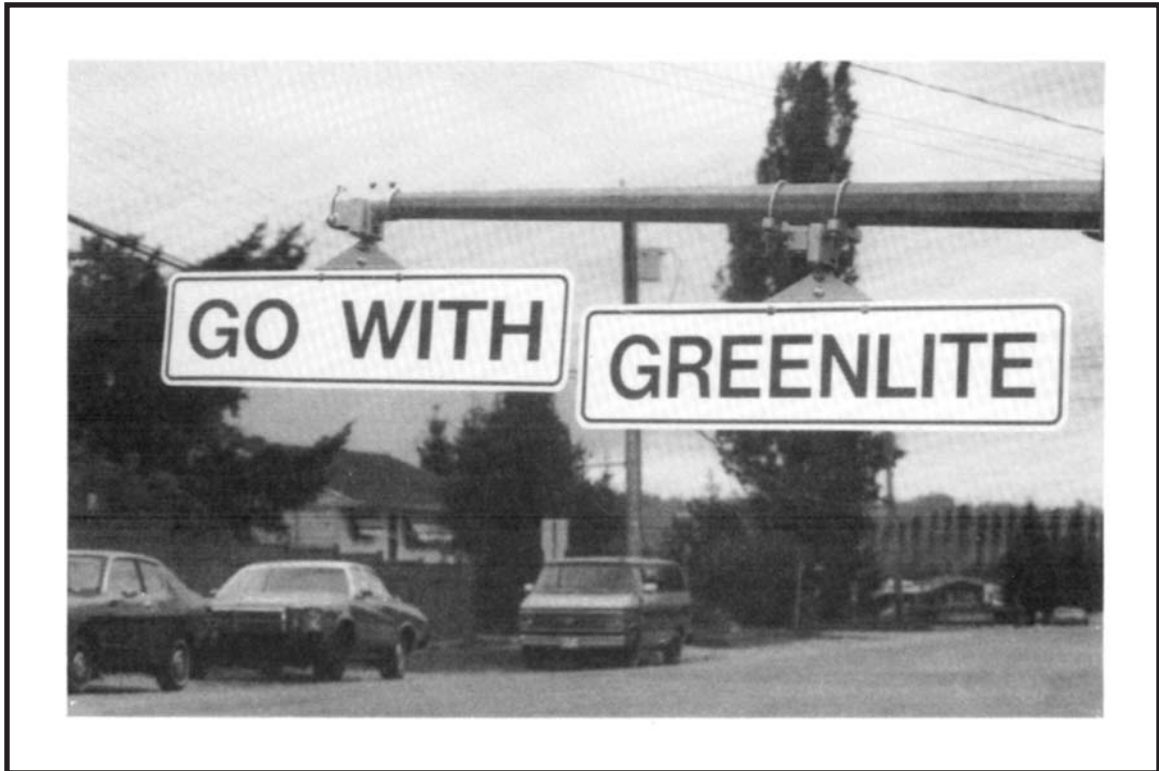

GREENLITE TRAFFIC Signal Accessories are developed through consultation with traffic engineers and with advice from field staff and traffic maintenance crews.

GREENLITE TRAFFIC offers custom designing and production services that find solutions to any traffic control system problem.



Greenlite Traffic

P.O. Box 64551
Coquitlam, B.C. V3J 7V7
Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961
Fax: (604) 936-1922
Toll Free: 1-888-936-1961
Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 200R - RIGHT HAND



- Right hand indicator
- Curved back
- Bolt on Band on mounting
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
(other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purposc lubricant with teflon
- Temperature range: -54 to 176 degrees celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 3 lb 2 oz
- 4 boxes per carton
- Shipping carton weight - 14 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 200L - LEFT HAND



- Left hand indicator
- Curved back
- Bolt on / Band on mounting
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
(other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purpose lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 3 lb 2 oz
- 4 boxes per carton
- Shipping carton weight - 14 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 238R - RIGHT HAND



- Right hand indicator
- Flat back
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purpose lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 2 lb 6 oz
- 4 boxes per carton
- Shipping carton weight - 10 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551
Coquitlam, B.C. V3J 7V7
Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961
Fax: (604) 936-1922
Toll Free: 1-888-936-1961
Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 238L - LEFT HAND



- Left hand indicator
- Flat back
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purpose lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 2 lb 6 oz
- 4 boxes per carton
- Shipping carton weight - 10 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 240 - BICYCLE



- Bicycle indicator
- Flat back
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purpose lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 2 lb 6 oz
- 4 boxes per carton
- Shipping carton weight - 10 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 245 - DOUBLE ARROW



- Double Arrow indicator
- Flat back
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purpose lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 2 only 1/4-20 x 1 1/4 hex head bolts
 - 2 only flat washer
 - 2 only nylon washers
- 1 per box
- Shipping box weight - 2 lb 6 oz
- 4 boxes per carton
- Shipping carton weight - 10 lbs 2 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 250 - MODIFIED



- Modified adaptor
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purposc lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 4 only 8/32 x 1 3/4 hex head bolts
- 1 per box
- Shipping box weight - 1 lb 4 oz
- 8 boxes per carton
- Shipping carton weight - 5 lbs 9 oz

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551
Coquitlam, B.C. V3J 7V7
Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961
Fax: (604) 936-1922
Toll Free: 1-888-936-1961
Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON KIT - GEL 295



- Flat back
- Bolt on mounting
- Neoprene gasket
- Ready to install
- Palm button: polished aluminum
- One piece construction
- Powder coated
- Screen painted hi-lites
- Black on white
- (other colour combinations upon request)
- Palm button and pushbutton are secured with medium strength adhesive
- Internal working parts coated with multi-purposc lubricant with teflon
- Temperature range: -54 to 176 degrees Celsius continuous
- Lubricant: waterproof
- Standard stainless mounting hardware
 - 4 only 1/4-20 x 1 hex head bolts
 - 4 only flat washer
 - 4 only nylon washers

COMMERCIAL GRADE PUSHBUTTON

- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551

Coquitlam, B.C. V3J 7V7

Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961

Fax: (604) 936-1922

Toll Free: 1-888-936-1961

Email: info@GreenliteTraffic.com

PEDESTRIAN PUSHBUTTON - GEL 298 - SWITCH



- Double-break switch
- Epoxy seal to protect interval contacts and terminals
- Pushbutton: CSA approved
- Dust-tight
- Waterproof: submersible to 3 feet water pressure
- Mechanical life: 1,000,000 cycles
- Normally open
- Case: aluminum anodized clear
- Soldered closed loop lead: 12' (3.68 m)
- Solder contact coated: silicon conformal coating
- Wire: 1417 RW90 purple
- Wire: CSA approved



Greenlite Traffic

P.O. Box 64551
Coquitlam, B.C. V3J 7V7
Website: <http://www.GreenliteTraffic.com>

Phone: (604) 936-1961
Fax: (604) 936-1922
Toll Free: 1-888-936-1961
Email: info@GreenliteTraffic.com